



DUCTWORK DEMOLITION  
3RD FLOOR – MECHANICAL  
SCALE: 1/8" = 1'-0"

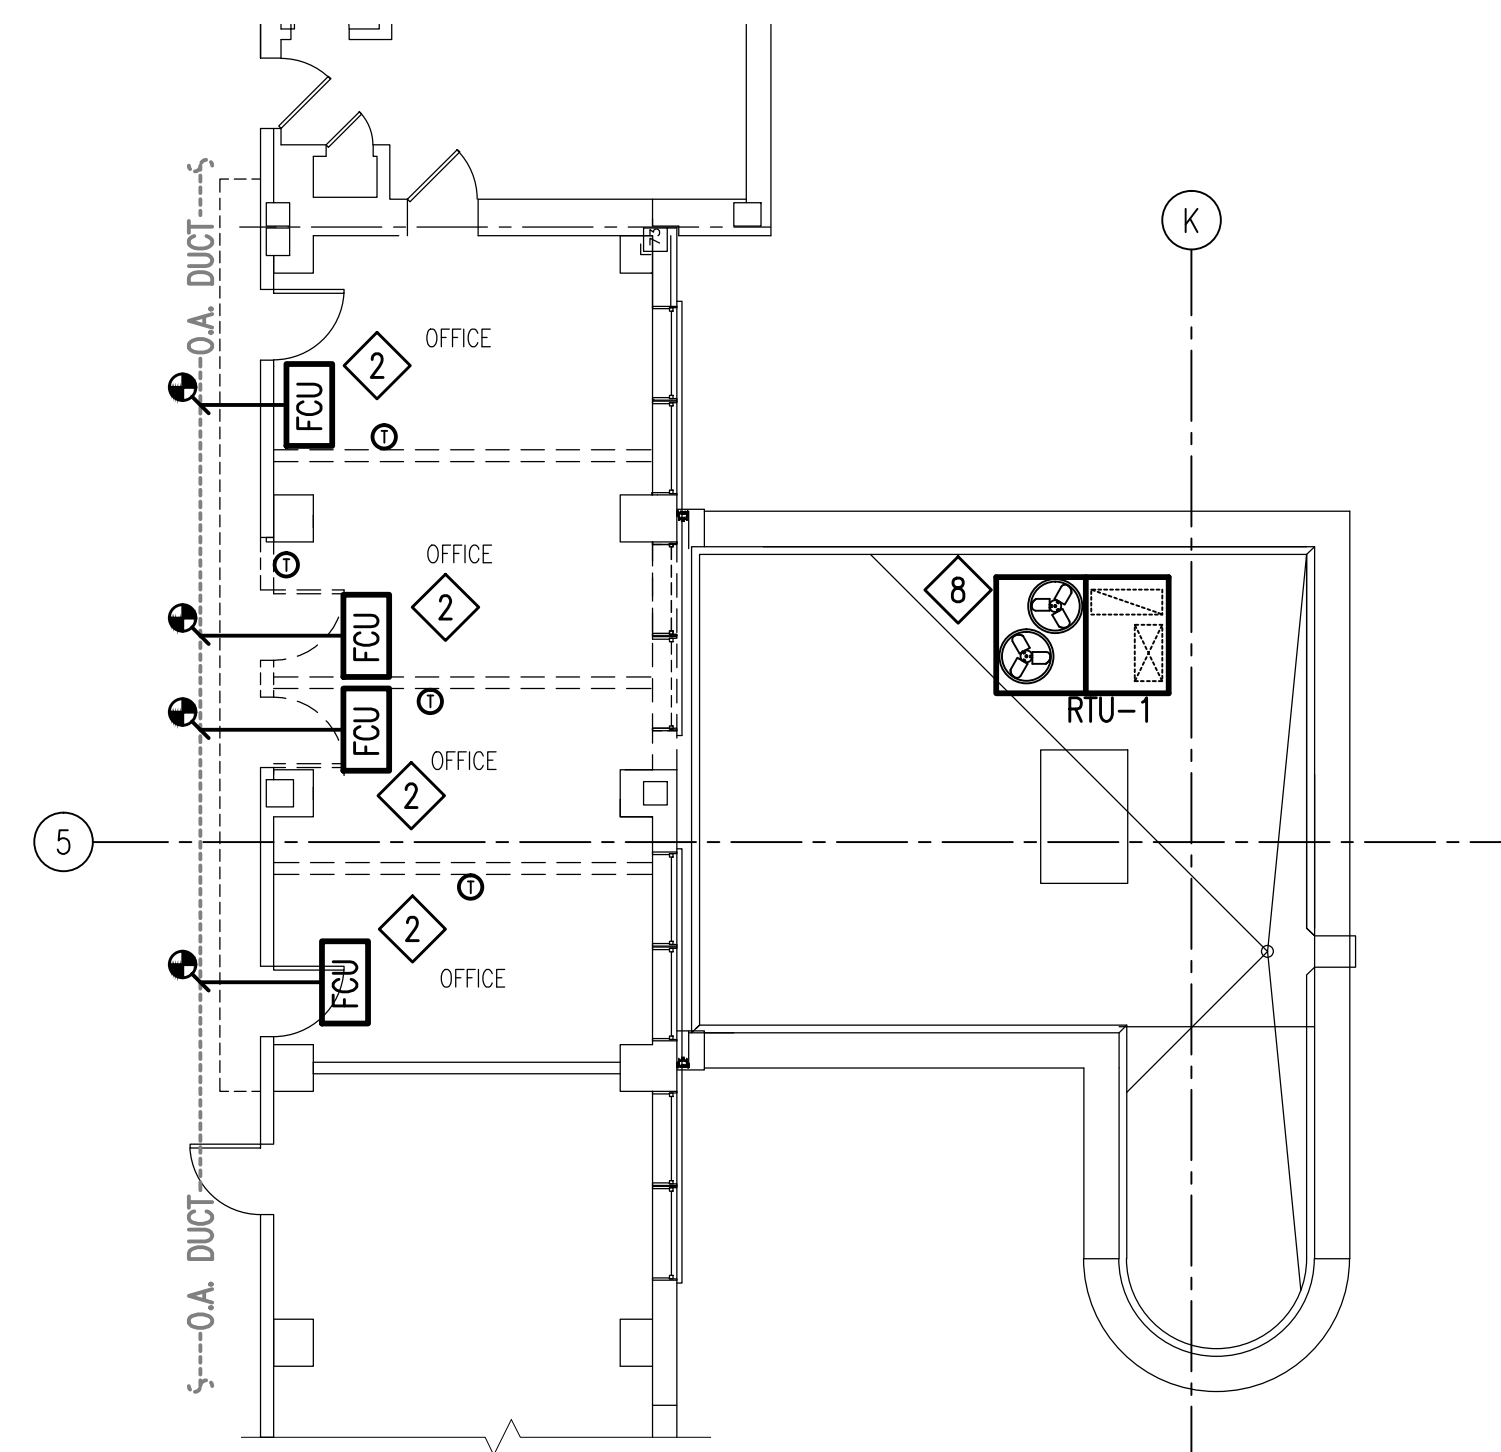


DUCTWORK DEMOLITION  
4TH FLOOR & ELEVATOR ROOF - MECHANICAL

SCALE: 1/8" = 1'-0"

0 4' 8' 16'

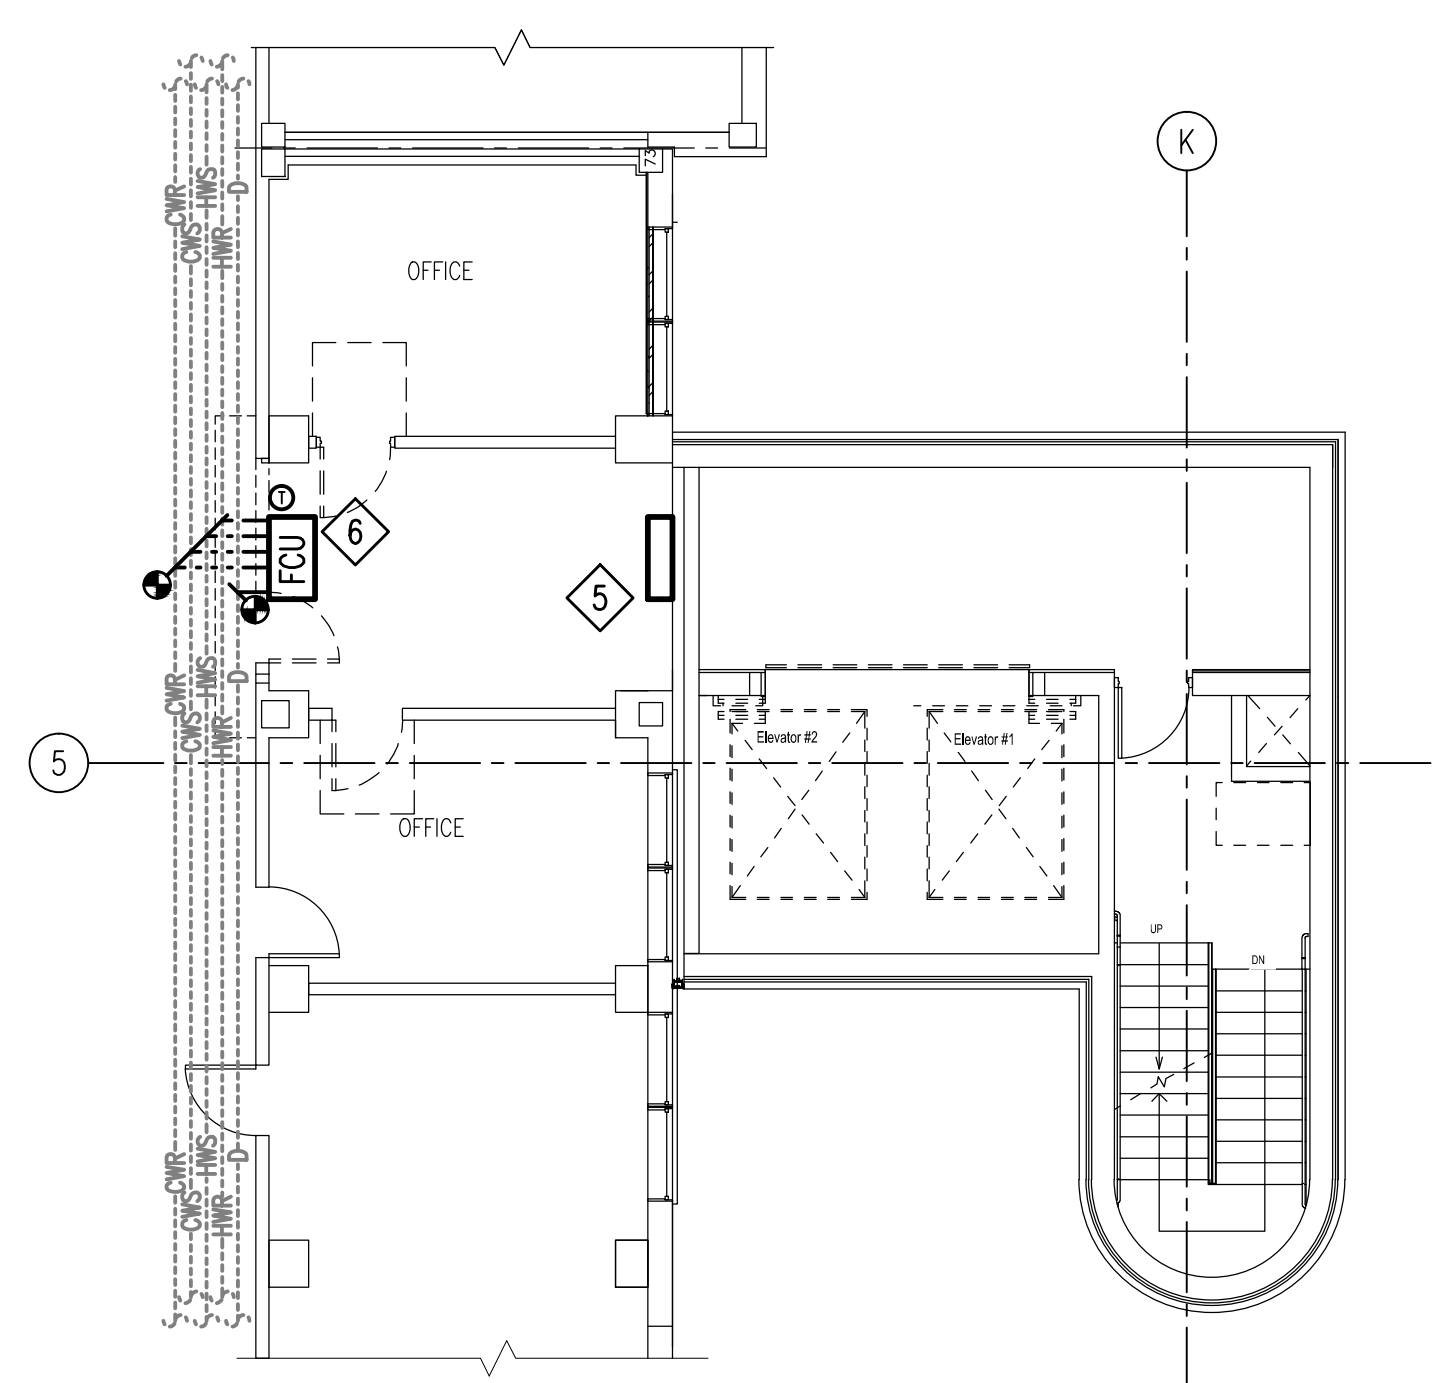

PIPING DEMOLITION  
3RD FLOOR - MECHANICAL  
SCALE: 1/8" = 1'-0"

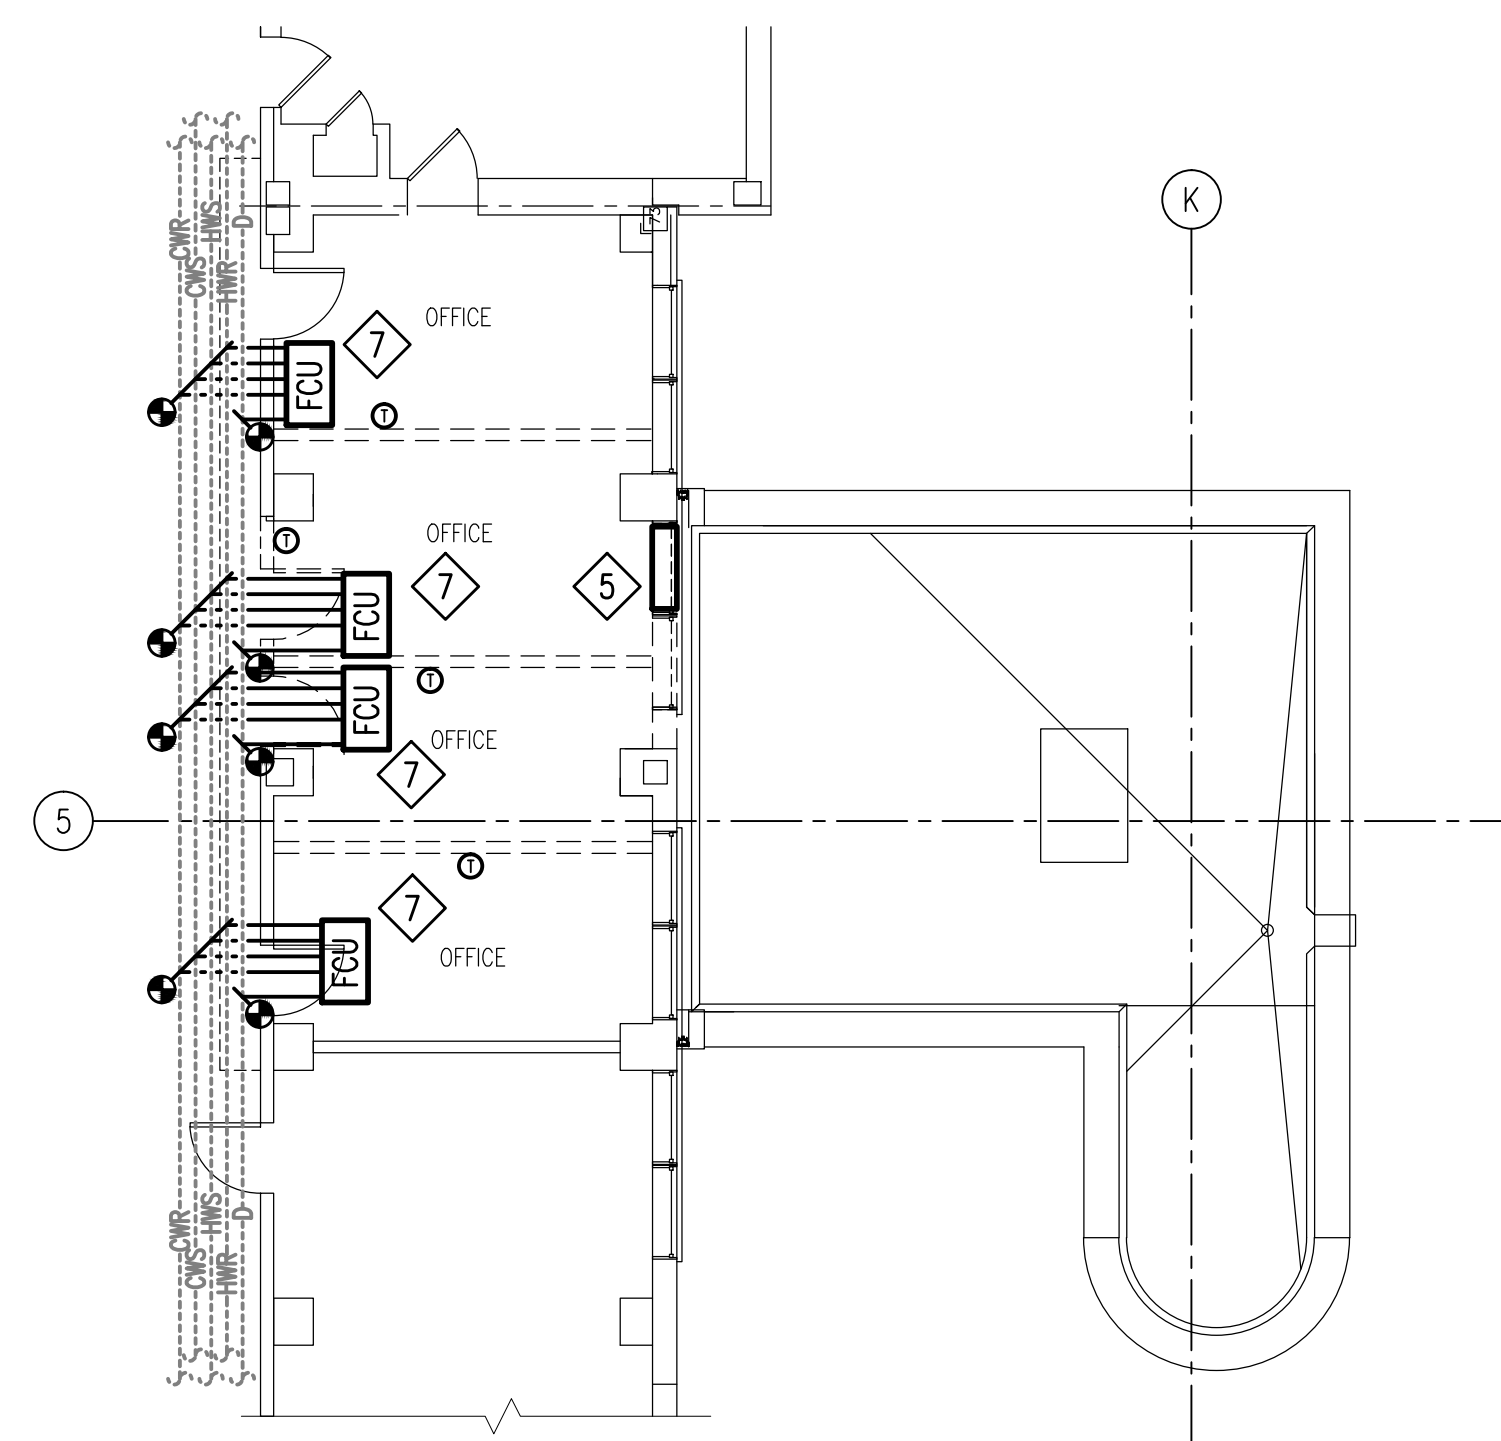

**PIPING DEMOLITION**  
**4TH FLOOR & ELEVATOR ROOF — MECHANICAL**  
 SCALE: 1/8" = 1'-0"

- ## DEMOLITION NOTES:
- (THIS SHEET ONLY)
- CAREFULLY REMOVE EXISTING FAN COIL UNIT AND TURN OVER TO GOVERNMENT. REMOVE VENTILATION AIR DUCT BACK TO MAIN DUCT AND PERMANENTLY PATCH AND RE-INSULATE MAIN DUCT. SEE GENERAL NOTES FOR ADDITIONAL REQUIREMENTS.
  - CAREFULLY REMOVE EXISTING FAN COIL AND WALL MOUNTED THERMOSTAT AND REINSTALL AS SHOWN IN NEW WORK PLAN. ALL VENTILATION AIR DUCT BRANCHES MUST BE REMOVED, CAPPED AND MAINS RE-INSULATED.
  - CAREFULLY REMOVE SMOKE VENT LOUVER AND REINSTALL AS SHOWN IN NEW WORK PLAN.
  - CAREFULLY REMOVE LOW LEAKAGE MOTORIZED DAMPER AND REINSTALL AS SHOWN IN NEW WORK PLAN.
  - REMOVE EXISTING ABANDONED STEAM CONVECTOR IN ITS ENTIRETY. REMOVE ALL ASSOCIATED STEAM AND CONDENSATE PIPING. PIPING MUST BE REMOVED TO BELOW FINISH FLOOR LEVEL.
  - CAREFULLY REMOVE EXISTING FAN COIL UNIT AND TURN OVER TO GOVERNMENT. REMOVE HWS/HWR AND CWS/CWR PIPING BACK TO MAINS AND PERMANENTLY CAP AT MAINS AND RE-INSULATE. COORDINATE REMOVAL OF COOLING COIL CONDENSATE PIPE WITH PLUMBING WORK. REMOVE VENTILATION AIR DUCT RUN OUT AND PATCH AND RE-INSULATE AT MAIN DUCT.
  - CAREFULLY REMOVE EXISTING FAN COIL AND WALL MOUNTED THERMOSTAT AND REINSTALL AS SHOWN IN NEW WORK PLAN. COORDINATE NEW COOLING COIL CONDENSATE DRAIN WITH CONDENSATE DRAIN PIPING MODIFICATIONS SHOWN ON PLUMBING DRAWINGS. ALL PIPE BRANCHES ON REMOVED UNITS MUST BE REMOVED, CAPPED AND MAINS RE-INSULATED.
  - CAREFULLY REMOVE ELEVATOR MACHINE ROOM ROOF-TOP PACKAGE AIR CONDITIONER AND ASSOCIATED CONTROLS, RETURN DUCT SYSTEMS AND SUPPLY DUCT SYSTEM AND RE-INSTALL ON NEW ELEVATOR MACHINE ROOM.

[illegible]


CONSULTANTS:



440 Martin Luther King, Jr. Blvd., Suite 401  
Macon, Georgia 31201  
Phone: (478) 314-1270 - Fax: (478) 314-1271  
[www.aes-pe.com](http://www.aes-pe.com)



ARCHITECT/ENGINEERS:



590 Means Street NW, Suite 200  
Atlanta, GA 30318  
404.214.9774

Drawing Title:

ENLARGED STAIR DUCTWORK AND PIPING  
DEMOLITION FLOOR PLANS - MECHANICAL

Approved: Project Director

Project Title:

EXPAND RADIOLOGY AND SPS  
OVERTON BROOKS VAMC

Location:

SHREVEPORT, LA

Date:

04-17-2015

Checked:
----------

P.I.C.

Drawn:

JSW

Project Number:

667-083

Building Number:

1

Drawing Number:

MD403

Dwg. 105 of 160

FINAL SUBMITTAL

OFFICE OF  
CONSTRUCTION  
AND FACILITIES  
MANAGEMENT

U.S. Department  
of Veterans Affairs